

Combilume Wall



Installation

For wall installation.

Connection

Connection is made at the end of the luminaire, see the dimensional drawing. Optional cable entry in the end caps or middle of the luminaire. 5-way snap-in terminal block at one end of the luminaire. Option of 1-phase through-wiring.

Design

Luminaire body of extruded aluminium in white (RAL 9016) or alu-grey (RAL 9006) textured enamel.

Louvre

Opal – plate in frosted acrylic (PMMA).

Dimming

DALI/Phase-pulse control as standard.

Miscellaneous



Combilume uses side emitting LED technology for a glare-free light

LED-information

4000 K: Ra (CRI) min. 80, L₇₀ 50 000 h, MacAdam 4 SDCM.

DALI/Phase-pulse control

W	Module	Louvre	Kg	Colour	CCT (K)	Art.nr
LED (System)						
13	300x600	Opal	6.0	White	4000	11909-402

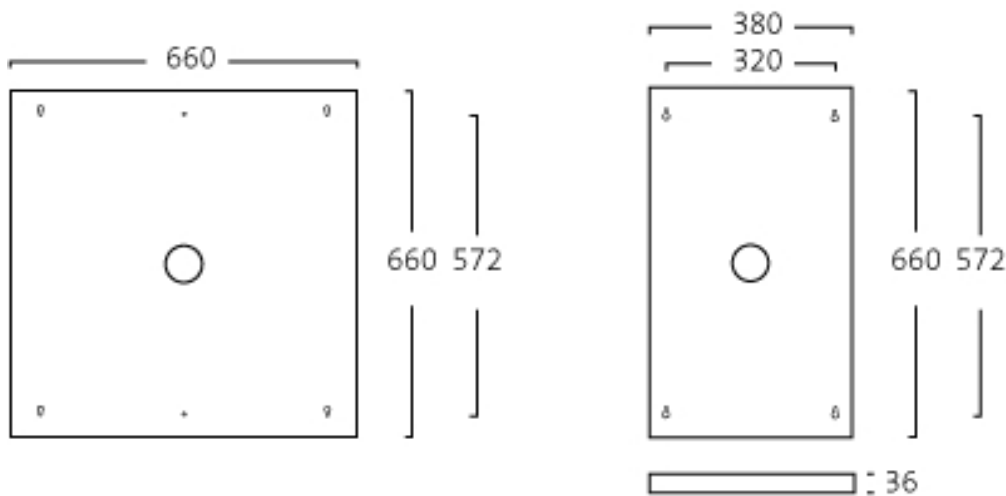

Opal 300x600

Opal 600x600